


# Installation guide


CHAT BOARD®

Classic - Classic Crafted - Matt - Elements - BuzziFelt - Planner


CHAT BOARD A/S  
Tempovej 10 C  
DK-2750 Ballerup  
Tel. +45 44845144  
Fax +45 44845688  
info@chat-board.dk  
www.chat-board.dk

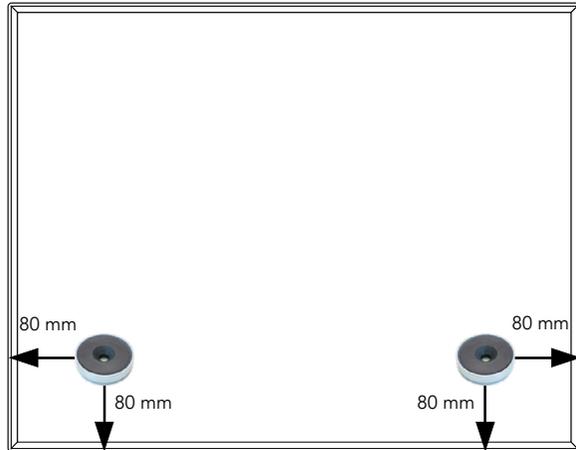

Horizontal installation

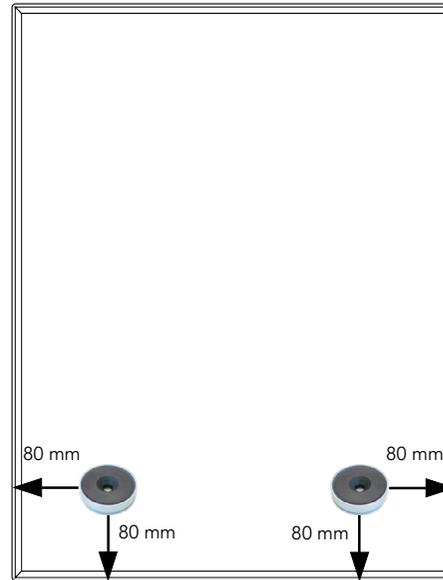

Vertical installation

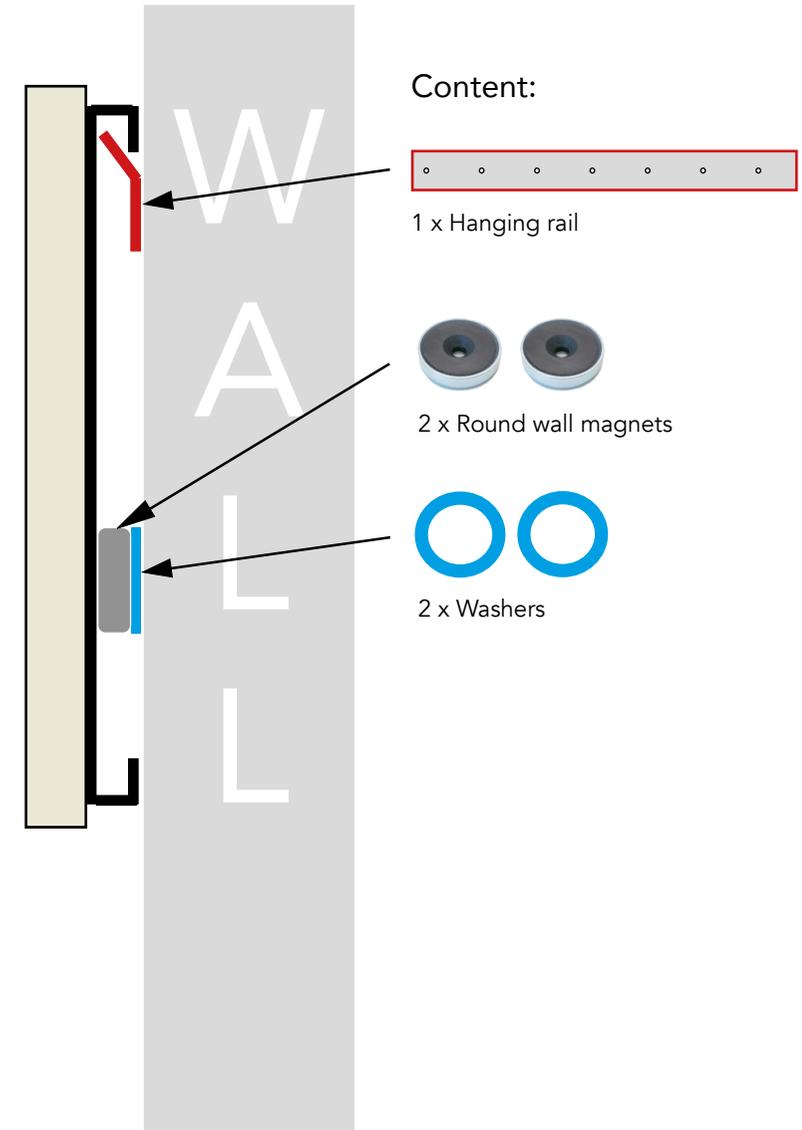

## Instructions:

Attach the metal hanging rail on the wall positioned 5 mm below the position where you want the top edge of the glass to be. The rail opening facing upwards and out. Use screws and plugs suitable for the material of the wall.

Attach the two round magnets on the wall as indicated on the drawings above - with the centre spaced 80 mm away from the sides and bottom edge of the glass panel. Make sure to put a washer between the wall and the magnet for necessary distance needed for the magnet to adhere on to the steel backing of the board.

Now locate the board centred onto the hanging rail and the job is done as the wall magnets will draw the board firmly against the wall.

# Safety precautions and hazard warnings!

CHAT BOARD A/S  
Tempovej 10 C  
DK-2750 Ballerup  
Tel. +45 44845144  
Fax +45 44845688  
info@chat-board.dk  
www.chat-board.dk



Following guidelines should be observed and known to all people handling magnetic material, especially Rare Earth magnetic materials.

Always keep a safe distance of strong magnetic fields. "Guidelines on limits of exposure to static magnetic fields" concerning health are available at the International Commission on Non-Ionizing Radiation Protection. Strong magnetic fields can disrupt and destroy magnetic data carriers, such as credit cards, electronic & mechanical components, and similar devices.

Always wear protective glasses and/or other protective equipment to prevent risk of injury from splintering and crushing. Avoid impact as sintered magnets are hard and brittle and will shatter into many sharp fragments.

To avoid crushing the skin, magnets should be handled with great care because of the strong attractive forces. Allergic reactions might occur to people with known allergies to ceramic or metallic substances. Always wear protection while handling magnets!

#### Operating temperatures and radiation

The highest allowed operating temperature of our magnet materials varies between 80C and 450C. Permanent magnets should not be exposed to ionizing radiation for long periods of time. They will lose their magnetization.

#### Possible explosion or fire

Magnets can emit sparks on impact and must be handled in areas with no risk of explosion! Grinding dust and shavings are combustible. These processes should be done in an inert gas environment. Or, always have a constant water flow at the mechanical processing point of Rare Earth magnets! Even dried-out grinding wheel shavings and debris can combust. In case of fire, to extinguish, only use sand or powder type fire extinguisher, equipped with metal fire powder.

#### Storage and transportation

Rare earth magnets must be stored in a dry environment. For transport, such as air cargo the regulations for Stray Magnetic Fields apply (International Air Transport Association - Dangerous Goods Regulations). Goods that will be sent by air cargo must pack in a suitable manner (by using shielding), which will prevent any magnetic fields from escaping, and any such emissions are kept below the requirements according IATA regulations. If packaging, received by air, is untouched and still in place, it does not have to be considered as dangerous goods during air transport.

#### Choking hazard:

Not for children under 6 years. This product contains small magnets. Swallowed magnets can stick together across intestines causing serious infections and death. Seek immediate medical attention if magnets are swallowed.

If you have any further questions about handling and using our magnet material, please contact us.

CHAT-BOARD® by CHAT BOARD A/S  
Tempovej 10 C – DK 2750 Ballerup  
Denmark  
T +45 4484 5144 info@chat-board.dk